

1


COLABELINDER¹⁵⁰

By

OMNISISTEM

www.omnisistem.com

253.395.9500

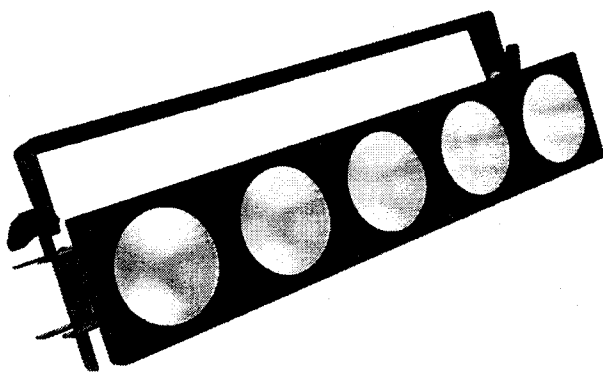

By

OMNISISTEM

www.omnisistem.com

6403 South 208th Street, Kent, WA 98032, USA

Tel: 253.395.9500 Fax: 253.395.9494

Features

Voltage: AC100-240V 50/60Hz

Power: 150W

Light source: 5pcs 30W COB RGB 3in1 LEDs

1, 3, 5, 7, 15, 18DMX channels selectable

Each LED can be controlled individually

Sound controlled via built-in microphone

Adjustable sound sensitivity

Function: Color mix, automatic color change, built-in program and strobe effect with adjustable speed, dimmer, master/slave

LED display, easy to control

Full DMX512 control


Unit can be connected and program differently.

With Safety loop

Package size: 62X15X16CM

Weight: 3.5kg

1, Digital display

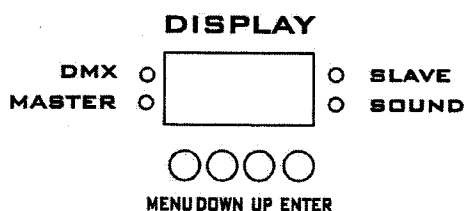

display	Mode	Function
ADDR	DMX address setting	A001-A512
CHND	Channel mode	1CH/3CH/5CH/7CH/15CH/18CH
SLND	Slave mode	Master Slave 1 - Slave 2
SOUN	Sound mode	Sound on/off
SENE	Sound sense	Sound sense 0-100
BALA	White Balance	Red 000~255 Green 000~255 Blue 000~255
BLND	Black out mode	YES-NO
Led	LED mode	ON-OFF
DISP	Display inversion	Display Inversion, Idsp-dspl
TEST	Test mode	Self test
TEMP	Temperature	0 ~ 9999
Hour	Using time of light	Fixture hours, 0 ~ 9999

Note:1, To the function mode you need, press Enter to confirm, press MODE about two seconds to quit.

2, The equipment can accept DMX signal whenever Auto or sound active mode, DMX is preferential.

3, Black out mode: Choose Yes, when no DMX, the unit goes to be Black out mode;
Choose No, when no DMX, the unit goes to be Sound mode.

2,DMX operation

1CH mode:

CH1	Show	000-007 Blackout 008-022 Show 1 023-037 Show 2 038-052 Show 3 053-067 Show 4 068-082 Show 5 083-097 Show 6 098-112 Show 7 113-127 Show 8 128-142 Show 9 143-157 Show 10 158-172 Show 11 173-187 Show 12 188-202 Show 13 203-217 Show 14 218-232 Show 15 233-247 Show 16 248-255 Sound active running show 1 to 16
-----	------	--

3CH mode:

CH1	000-255	Red
CH2	000-255	Green
CH3	000-255	Blue

5CH Mode:

CH1	000-255	The 1 st head Color
CH2	000-255	The 2 nd head Color
CH3	000-255	The 3 rd head Color
CH4	000-255	The 4 th head Color
CH5	000-255	The 5 th head Color

7CH Mode:

CH1	000-255	The 1 st head Color
CH2	000-255	The 2 nd head Color
CH3	000-255	The 3 rd head Color
CH4	000-255	The 4 th head Color
CH5C F	000-255	The 5 th head Color
CH6	000-255	Dimmer
CH7	000-255	Strobe

15CH Mode:

CH1,CH4,CH7, CH10,CH13	000-255	Red 1/2/3/4/5
CH2,CH5,CH8, CH11,CH14	000-255	Green 1/2/3/4/5
CH3,CH6,CH9, CH12,CH15	000-255	Blue 1/2/3/4/5

18CH Mode:

CH1,CH4,CH7, CH10,CH13	000-255	Red 1/2/3/4/5
CH2,CH5,CH8, CH11,CH14	000-255	Green 1/2/3/4/5
CH3,CH6,CH9, CH12,CH15	000-255	Blue 1/2/3/4/5
CH16	000-255	Color
CH17	000-255	Dimmer
CH18	000-255	Strobe

Fans adjustable function: temperature: 40°~ 60°, fans start to work, from slow to fast, the temperature higher, the fans speed will be faster. When temperature reach to 60°, the fans will work in full speed, and it will stop working when temperature $\leq 35^\circ$

Power reduction:

When the fans work in full speed, if the temperature still keeps on increasing, for every degree increased, the power will be reduced 5%. The light will be off when temperature reach to 68°, and it will continue to work only when the temperature $\leq 60^\circ$.

Safety instruction:**CAUTION!**

Be careful with your operations. With a dangerous voltage you can suffer a dangerous electric shock when touching the wires!

Electric shock when touching the wires!

This device has left our premises in absolutely perfect condition. In order to maintain this condition and to ensure a safe operation, it is absolutely necessary for the user to follow the safety instructions and warning notes written in this manual.

Please note: Every information is subject to change without prior notice